

AN APPLICATION OF ALGORITHMS OF ADAMS AND GEAR METHODS ON BOUNDARY LAYER CONVECTIVE HEAT TRANSFER WITH PRESSURE GRADIENT USING HOMOTOPY PERTURBATION METHOD (HPM) OVER A FLAT PLATE

Amber Nehan Kashif^{b,c}, Zainal Abdul Aziz^{a,b}, Faisal Salah^c, K. K. Viswanathan^{a,d*}

^aUTM Centre for Industrial and Applied Mathematics (UTM-CIAM), Faculty of Science, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^bDepartment of Mathematical Sciences, Faculty of Science, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^cDepartment of Mathematics, Faculty of Science, University of Kordofan, 51111 El Obeid, Sudan

^dKuwait College of Science and Technology, Doha District, Block 4, P.O. Box No. 27235, Safat 13133, Kuwait

Article history

Received

15 December 2016

Received in revised form

30 December 2017

Accepted


15 January 2018

Published online

1 April 2018

*Corresponding author
viswanathan@utm.my

Graphical abstract

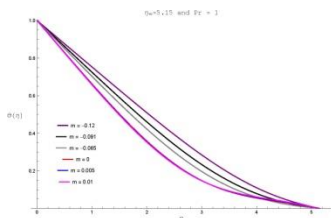

Abstract

Boundary layer flow of convective heat transfer with pressure gradient over a flat plate is solved with an application of algorithms of Adams Method (AM) and Gear Method (GM) using Homotopy Perturbation Method (HPM). The distributions of temperature and velocity in the boundary layer are examined, particularly on the influences due to Prandtl number (Pr) and pressure gradient (m). Consequently, the equations of momentum and energy are resolved concurrently. These HPM outcomes have been compared with the previous published work in the literature; and these are found to be in good agreement with the results obtained from numerical methods.

Keywords: Adams Method (AM), Gear Method (GM), Homotopy Perturbation Method (HPM), pressure gradient parameter, convective heat transfer

Abstrak

Aliran lapisan sempadan bagi pemindahan haba perolakan dengan kecerunan tekanan di atas plat rata diselesaikan dengan penggunaan Kaedah Adam dan Kaedah Gear melalui Kaedah Usikan Homotopi. Taburan suhu dan halaju dalam lapisan sempadan dikaji, terutamanya terhadap pengaruh bilangan Prandtl (Pr) dan kecerunan tekanan (m). Untuk memenuhi matlamat ini, persamaan tidak linear momentum dan tenaga diselesaikan secara serentak. Keputusan-keputusan HPM telah dibandingkan dengan kerja-kerja penerbitan terdahulu dalam kesusasteraan; dan keputusan ini didapati selari dengan keputusan-keputusan yang diperolehi melalui kaedah berangka.

Kata kunci: Kaedah Adams, Kaedah Gear, Kaedah Usikan Homotopi, parameter kecerunan tekanan, pemindahan haba perolakan

© 2018 Penerbit UTM Press. All rights reserved

1.0 INTRODUCTION

Nothing is perfect in this world. So, there is always a room for improvement. This is a case of reinvestigation of the problem posed by Fathizadeh and Rashidi in [1]. For this purpose the two main algorithms, the Adams and Gear methods have been used in [2]. Recently an attempt have been made to solve the same problem with laminar boundary layer over a permeable surface with convective boundary condition using HAM by Shagaiya and Daniel in [3] and their reported results were not similar as Fathizadeh and Rashidi in [1]. Importance of a boundary layer flow cannot be avoided in various areas of fluid mechanics since it reveals the motion of a viscous fluid closed to a body.

In recent past, researchers have discussed the boundary layer flow convection heat and mass transfer over a flat plate in [4]–[10], boundary layer flow and mass transfer with a stretching or shrinking sheet in [11]–[14], as similarity solutions for flow and heat transfer over a permeable surface with convective boundary condition in [15]. The Homotopy Perturbation Method (HPM) is a novel and effective method, and has been successfully applied to solve various nonlinear complicated engineering problems that cannot be solved by analytical method used by Ji-Huan [16]–[18], Cai *et al.* [19], Cveticanin [20], El-Shahed [21], Abbasbandy [22] and Belendez *et al.* [23]. Ji-Huan and others have built up further this technique for diverse non linear problems [24]–[27].

Researchers have implemented some other approximation techniques like Variational Iteration Method (VIM), Adomian Decomposition Method (ADM) and Homotopy Analysis Method (HAM) effectively. Yulita Mollia *et al.* [28] have obtained the analytical solutions to fractional heat and wave like equations with variable coefficients with the help of VIM successfully. We are considering HPM in our study.

The present work deals with an application of HPM using the algorithms of Adams and Gear methods on boundary layer convective heat transfer with pressure gradient over a flat plate. This study is motivated by the different results for pressure gradient (m) reported in Cebeci and Bradshaw [29], Shagaiya and Daniel in [3] and Fathizadeh and Rashidi in [1].

2.0 METHODOLOGY

It is a composition of three steps, first one is basics of HPM, second one is mathematical formulation and third one is boundary layer flow over a flat plate.

2.1 Basics of HPM

The fundamental concepts of this technique are given as follows:

Consider the nonlinear differential equation

$$A(u) - f(r) = 0, \quad r \in \Omega \quad (1)$$

with boundary conditions

$$B(u, \partial u / \partial n) = 0, \quad r \in \Gamma \quad (2)$$

where A is a differential operator, B is an operator, $f(r)$ is an analytic function, Γ is the domain Ω boundary. A can be divided into L linear and N non linear, therefore, Eq.(1) is of the form:

$$L(u) + N(u) - f(r) = 0 \quad (3)$$

By the homotopy method [29], a homotopy $v(r, p): \Omega \times [0, 1] \rightarrow R$ is constructed, which satisfies

$$H(v, p) = (1 - p)[L(v) - L(u_0)] + p[A(v) - f(r)] = 0, \quad p \in [0, 1], \quad r \in \Omega \quad (4)$$

or

$$H(v, p) = L(v) - L(u_0) + pL(u_0) + p[N(v) - f(r)] = 0, \quad (5)$$

where $p \in [0, 1]$ is a parameter which is embedded, u_0 is the initial approximated solution of Eq.(1), where the boundary conditions are fulfilled. Clearly, from Eq. (4 or 5), H takes the forms

$$H(v, 0) = L(v) - L(u_0) = 0 \quad (6)$$

$$H(v, 1) = A(v) - f(r) = 0 \quad (7)$$

the transformation of p from 0 to 1 is referred to $v(r, p)$, from $u_0(r)$ to $u(r)$. Topologically, this is known as deformation, besides $L(v) - L(u_0)$, $A(v) - f(r)$ are termed homotopic. In this study, the embedding parameter p as a small parameter and assumed that the solution of Eq. (4) or Eq. (5) can be written as a power series in p :

$$v = v_0 + pv_1 + p^2v_2 + \dots \quad (8)$$

Setting $p = 1$ results in the approximate solution of Eq.(1):

$$u = \lim_{p \rightarrow 1} v = v_0 + v_1 + v_2 + \dots \quad (9)$$

The coupling of the perturbation method and the homotopy method is called the homotopy perturbation method, which has eliminated limitations of the traditional perturbation methods. On the other hand, the proposed technique can take full advantage of the traditional perturbation techniques.

2.2 Mathematical Formulation

The Navier-Stokes equation is considered for the boundary layer flow over a flat plate with a pressure gradient term. Mathematical formulation for the Navier-Stokes equations become under the suppositions [30]:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (10)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{dp}{dx} + \nu \frac{\partial^2 u}{\partial y^2} \quad (11)$$

and

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = -\frac{\kappa}{\rho c_p} \frac{\partial^2 T}{\partial y^2} \quad (12)$$

where u and v are the velocity components in x – and y –directions respectively, ν is the kinematic fluid viscosity, ρ is the fluid density, μ is the coefficient of fluid viscosity, λ is the relaxation time, T is the temperature, κ is the fluid thermal conductivity and c_p is the specific heat. Now, the stream function $\psi(x, y)$ is introduced as:

$$u = \frac{\partial \psi}{\partial y}, \quad v = \frac{\partial \psi}{\partial x} \quad (13)$$

For an external flow $-\frac{1}{\rho} \frac{dp}{dx}$ can be replaced by $U_\infty \frac{dU_\infty}{dx}$

where as in relations with Eq. (13), the Eq. (10) is identically satisfied and the Eqs. (11) and (12) are reduced to the following forms:

$$\frac{\partial \psi}{\partial y} \frac{\partial^2 \psi}{\partial x \partial y} - \frac{\partial \psi}{\partial x} \frac{\partial^2 \psi}{\partial y^2} = U_\infty \frac{dU_\infty}{dx} + \nu \frac{\partial^3 \psi}{\partial y^3} \quad (14)$$

and

$$\frac{\partial \psi}{\partial y} \frac{\partial T}{\partial x} - \frac{\partial \psi}{\partial x} \frac{\partial T}{\partial y} = \frac{\kappa}{\rho c_p} \frac{\partial^2 T}{\partial y^2} \quad (15)$$

Here, we have introduced the dimensionless variables η and ψ as:

$$\eta = y \sqrt{\frac{U_\infty}{\nu x}}, \quad \psi = f(\eta) \sqrt{\nu x U_\infty}, \quad \theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \text{ and } \left\{ U_\infty = Cx^m, \quad m = \frac{x}{U_\infty} \frac{dU_\infty}{dx} \right\} \quad (16)$$

Based on Eq. (16), we have used similarity transformation to reduce the governing differential equations Eq. (14) and Eq. (15) to an ordinary non-linear differential equations Eq. (17) and Eq. (18) respectively.

$$f''' + \left(\frac{m+1}{2}\right) f f'' + m(1 - (f')^2) = 0 \quad (17)$$

$$\theta'' = \frac{\text{Pr}(m+1)}{2} f \theta' = 0 \quad (18)$$

where f is related to the velocity (u) by $f' = \frac{u}{U_\infty}$. The reference velocity is the free stream velocity of forced convection [1] and $\text{Pr} = \frac{\mu c_p}{\kappa}$ is the Prandtl number [31]. The boundary conditions are obtained from the similarity variables.

$$f(0) = 0, \quad f'(0) = 0, \quad f'(\eta_\infty) = 1, \quad \theta(0) = 1, \quad \theta(\eta_\infty) = 0. \quad (19)$$

2.3 Boundary Layer Flow Over a Flat Plate

In accordance to HPM technique, then Eq.(17) and Eq. (18) become:

$$(1-p)(f'''' - f_0''''') + p \left(f'''' + \left(\frac{m+1}{2}\right) f f'' + m(1 - f'^2) \right) = 0 \quad (20)$$

$$(1-p)(\theta'' - \theta_0'') + p \left(\theta'' + \left(\frac{\text{Pr}(m+1)}{2}\right) f \theta' \right) = 0 \quad (21)$$

$$f = f_0 + p f_1 + p^2 f_2 + \dots \quad (22)$$

$$\theta = \theta_0 + p \theta_1 + p^2 \theta_2 + \dots \quad (23)$$

Assuming $f'''' = 0, \theta'' = 0$, and substituting f from Eq. (22) into Eq. (20) and θ from Eq. (23) into Eq. (21) after some simplification, rearrangement and equating the similar terms based on powers of p – terms, since $p \in [0,1]$ is an embedded parameter for approximation solution and assumed that the solution can be written as a power series in p , we have:

$$p^0: \begin{aligned} f_0'''' &= 0, \\ f_0(0) &= 0, \quad f_0'(0) = 0, \quad f_0'(\eta_\infty) = 1, \\ \theta_0'' &= 0, \\ \theta_0(0) &= 1, \quad \theta_0(\eta_\infty) = 0. \end{aligned} \quad (24)$$

$$p^1: \begin{aligned} f_1'''' &= -\left(\frac{m+1}{2}\right) f_0 f_0'' - m(1 - (f_0')^2), \\ f_1(0) &= 0, \quad f_1'(0) = 0, \quad f_1'(\eta_\infty) = 0, \\ \theta_1'' &= -\left(\frac{\text{Pr}(m+1)}{2}\right) f_0 \theta_0', \\ \theta_1(0) &= 0, \quad \theta_1(\eta_\infty) = 0. \end{aligned} \quad (25)$$

$$p^2: \begin{aligned} f_2'''' &= -\left(\frac{m+1}{2}\right) (f_0 f_1'' + f_1 f_0'') + 2m f_0' f_1', \\ f_2(0) &= 0, \quad f_2'(0) = 0, \quad f_2'(\eta_\infty) = 0, \\ \theta_2'' &= -\left(\frac{\text{Pr}(m+1)}{2}\right) (f_0 \theta_1' + f_1 \theta_0'), \\ \theta_2(0) &= 0, \quad \theta_2(\eta_\infty) = 0. \end{aligned} \quad (26)$$

$$p^3: \begin{aligned} f_3'''' &= -\left(\frac{m+1}{2}\right) (f_0 f_2'' + f_1 f_1'' + f_2 f_0'') \\ &\quad + m(2f_0' f_2' + (f_1')^2) \\ f_3(0) &= 0, \quad f_3'(0) = 0, \quad f_3'(\eta_\infty) = 0, \\ \theta_3'' &= -\left(\frac{\text{Pr}(m+1)}{2}\right) (f_0 \theta_2' + f_1 \theta_1' + f_2 \theta_0'), \\ \theta_3(0) &= 0, \quad \theta_3(\eta_\infty) = 0. \end{aligned} \quad (27)$$

$$\begin{aligned}
 p^4: f_4''' &= -\left(\frac{m+1}{2}\right)(f_3f_0'' + f_2f_1'' + f_1f_2'' + f_0f_3'') \\
 &\quad + 2m(f_1'f_2' + f_0'f_3') \\
 f_4(0) &= 0, \quad f_4'(0) = 0, \quad f_4'(\eta_\infty) = 0, \\
 \theta_4'' &= -\left(\frac{Pr(m+1)}{2}\right)(f_3\theta_0' + f_2\theta_1' + f_1\theta_2' + f_0\theta_3'), \\
 \theta_4(0) &= 0, \quad \theta_4(\eta_\infty) = 0.
 \end{aligned}
 \tag{28}$$

Solving Eqs. (24)-(28):

$$f_0 = \frac{1}{2\eta_\infty}(\eta^2) \tag{29}$$

$$f_1 = \frac{1}{480\eta_\infty^2}(-2\eta^5 + 5\eta^2\eta_\infty^3 + 6\eta^5m - 80\eta^3m\eta_\infty^2 + 105\eta^2m\eta_\infty^3) \tag{30}$$

$$f_2 = \frac{1}{161280\eta_\infty^3}(11\eta^8 - 28\eta^5\eta_\infty^3 + 26\eta^2\eta_\infty^6 + 27\eta^8m^2 - 896\eta^6m^2\eta_\infty^2 + 1764\eta^5m^2\eta_\infty^3 + \dots) \tag{31}$$

$$f_3 = \frac{1}{1277337600\eta_\infty^4}(-1500\eta^{11} + 5445\eta^8\eta_\infty^3 - 5742\eta^5\eta_\infty^6 + 825\eta^2\eta_\infty^9 + 3348\eta^{11}m^3 + \dots) \tag{32}$$

$$f_4 = \frac{1}{27897053184000\eta_\infty^5}(557940\eta^{14} - 2730000\eta^{11}\eta_\infty^3 + 4317885\eta^8\eta_\infty^6 - 1861860\eta^5\eta_\infty^9 + \dots) \tag{33}$$

$$\theta_0 = \frac{1}{\eta_\infty}(-\eta + \eta_\infty) \tag{34}$$

$$\theta_1 = \frac{1}{48\eta_\infty^2}(\eta^4mPr - \eta\eta_\infty^3mPr + \eta^4Pr - \eta\eta_\infty^3Pr) \tag{35}$$

$$\theta_2 = \frac{1}{80640\eta_\infty^3}(-40\eta^7m^2Pr^2 + 35\eta^4m^2Pr^2\eta_\infty^3 + 5\eta m^2Pr^2\eta_\infty^6 + 12\eta^7m^2Pr + \dots) \tag{36}$$

$$\theta_3 = \frac{1}{58060800\eta_\infty^4}(560\eta^{10}m^3Pr^3 - 600\eta^7m^3Pr^3\eta_\infty^3 - 75\eta^4m^3Pr^3\eta_\infty^6 + 115\eta m^3Pr^3\eta_\infty^9 + \dots) \tag{37}$$

$$\theta_4 = \frac{1}{2789705318400\eta_\infty^5}(-431200\eta^{13}m^4Pr^4 - 1724800\eta^{13}m^3Pr^4 - 2587200\eta^{13}m^2Pr^4 + \dots) \tag{38}$$

3.0 RESULTS AND DISCUSSIONS

The value of η_∞ has its impact on the boundary layer thickness. The work of Cebeci [28] and Bird [32] reported the values of η_∞ as 8 and 5.64 for both situations when pressure gradient $m = 0$ for velocity profile and energy profile as Prandtl number $Pr = 1$. In Esmaeilpour and Ganji [9] the solution for the boundary layer flow with no pressure gradient, the η_∞ is chosen as 5 in generating the velocity and temperature. In our case, η_∞ has been taken 5.25 and 5.15 for the velocity and temperature profiles respectively.

Table 1 Different values for m when $\eta_\infty = 5.25$

η	$f(\eta)$	Fathizadeh and Rashidi [1]	Amber <i>et al.</i>		
			$\eta_\infty = 5.25$		
			HPM		
m					
		0	0	-0.065	-0.11
0	0	0	0	0	0
0.2	0.006641	0.007793	0.00679	0.00377	0.00068
0.4	0.026676	0.029386	0.02717	0.01545	0.00333
0.6	0.059722	0.064757	0.06112	0.03553	0.00882
0.8	0.106108	0.113849	0.10856	0.06452	0.01804
1	0.165572	0.176556	0.16939	0.10288	0.03184
1.2	0.237949	0.252703	0.24341	0.15104	0.05111
1.4	0.329815	0.342031	0.33032	0.20938	0.07667
1.6	0.420321	0.444188	0.42976	0.27820	0.10938
1.8	0.529518	0.558712	0.54123	0.35773	0.15001
2	0.650024	0.685028	0.66410	0.44811	0.19929
2.2	0.781193	0.822444	0.79764	0.54934	0.25792
2.4	0.922290	0.970148	0.94102	0.66133	0.32648
2.6	1.072506	1.127221	1.09331	0.78384	0.40547
2.8	1.230977	1.292647	1.25349	0.91651	0.49525
3	1.396808	1.465334	1.42052	1.05885	0.59606
3.2	1.569095	1.644142	1.59336	1.21023	0.70799
3.4	1.746950	1.827919	1.77101	1.36994	0.83097
3.6	1.929525	2.015541	1.95253	1.53717	0.96476
3.8	2.116030	2.205961	2.13713	1.71108	1.10899
4	2.305746	2.398258	2.32418	1.89078	1.26311
4.2	2.498040	2.591683	2.51323	2.07542	1.42645
4.4	2.692361	2.785712	2.70404	2.26419	1.59826
4.6	2.882480	2.980074	2.89655	2.45635	1.77768
4.8	3.085321	3.174772	3.09086	2.65127	1.96382
5	3.283274	3.370069	3.28711	2.84841	2.15577

The aim of this section is to analyze the effects of various physical parameters on the function of non-Newtonian (Navier-Stokes equations) fluid, velocity and temperature distributions. The validation of the present method using homotopy perturbation method is checked with the results of the function of non-Newtonian fluid obtained by Fathizadeh and Rashidi [1] and the numerical results reported in it, in Table 1, when pressure gradient parameter $m = 0$ have been taken. Thus it can be observed in fourth column of the Table 1, are the results obtained in this paper, these seemed to be better than the results reported in Fathizadeh and Rashidi work [1] shown in the third column of Table 1, these results are more closed to the numerical (NM) results in the second column. Note that the values in second and third columns have been taken from [1]. For the better representation of the function of the non-Newtonian fluid, two other columns for different values of m have been given.

Table 2 For the different values of m when $\eta_\infty = 5.25$

η	$f'(\eta)$	Fathizadeh and Rashidi [1]	Amber et al.		
			$\eta_\infty = 5.25$		
			HPM		
			m		
NM	0	0	-0.065	-0.11	
0	0	0	0	0	0
0.2	0.066408	0.070328	0.067951	0.038199	0.00761
0.4	0.132764	0.140606	0.135847	0.078978	0.01962
0.6	0.198937	0.210705	0.203544	0.122279	0.036026
0.8	0.264709	0.28041	0.270803	0.167995	0.056813
1	0.32978	0.349425	0.337298	0.215963	0.081951
1.2	0.393776	0.417375	0.402616	0.265954	0.111382
1.4	0.456262	0.483811	0.466272	0.31767	0.145008
1.6	0.516757	0.548225	0.527725	0.370736	0.182683
1.8	0.574758	0.610057	0.586395	0.424703	0.224197
2	0.629766	0.668719	0.641694	0.479051	0.269266
2.2	0.68131	0.723611	0.693055	0.533196	0.317521
2.4	0.728982	0.77415	0.739966	0.586506	0.368501
2.6	0.772455	0.819799	0.782012	0.638321	0.421655
2.8	0.81151	0.860099	0.818912	0.68798	0.476342
3	0.846044	0.894707	0.850554	0.73485	0.531848
3.2	0.876081	0.923428	0.877026	0.778362	0.5874
3.4	0.901761	0.946255	0.898635	0.818047	0.642195
3.6	0.92333	0.963397	0.915908	0.853565	0.695433
3.8	0.941118	0.975307	0.929578	0.884736	0.746349
4	0.955518	0.982693	0.940539	0.911549	0.794251
4.2	0.966957	0.986519	0.94978	0.934168	0.838553
4.4	0.975871	0.987979	0.958285	0.952908	0.878796
4.6	0.982684	0.988443	0.966911	0.968204	0.914666
4.8	0.98779	0.98937	0.976249	0.98055	0.945998
5	0.991542	0.992164	0.986487	0.990439	0.972766

Table 2, are the results for velocity profile $f'(\eta)$ for the different values of pressure gradient parameter m at $\eta_\infty = 5.25$. Thus it is seen in the second and fourth columns of Table 2, are in close agreement with those published previously in Fathizadeh and Rashidi [1] in the third column. Note that the values in second and third columns have been taken from [1]. Rest of the columns have been given for the better representation of velocity profile $f'(\eta)$.

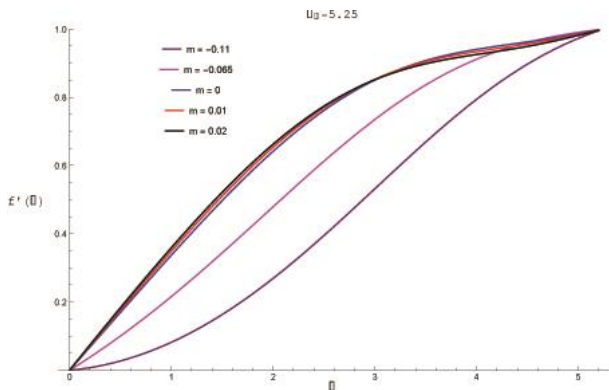


Figure 1 Velocity profile for $f'(\eta)$ for the different values of $-0.11 \leq m \leq 0.02$ when $\eta_\infty = 5.25$

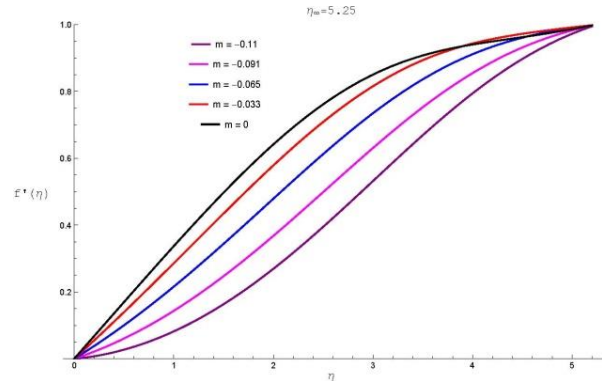


Figure 2 Velocity profile for $f'(\eta)$ for the different values of $-0.11 \leq m \leq 0$ when $\eta_\infty = 5.25$

Figures 1 and 2 show that the velocity profiles increase with increasing of m and consequently, the momentum boundary layer thickness becomes thinner and thinner.

Table 3 For the different values of m when $\eta_\infty = 5.15$

η	$\theta(\eta)$	Fathizadeh and Rashidi [1]	Amber et al.	
			$\eta_\infty = 5.15$	
			Pr	
			1	0.5
NM	HPM for m			
	0	0	0	0
0	1	1	1	1
0.2	0.933592	0.929826	0.932044	0.944699
0.4	0.867236	0.859703	0.864143	0.88942
0.6	0.801063	0.789759	0.796441	0.83422
0.8	0.735291	0.720208	0.729173	0.779194
1	0.67022	0.651349	0.662666	0.724473
1.2	0.606224	0.583556	0.597329	0.670223
1.4	0.543738	0.517278	0.533644	0.616645
1.6	0.483243	0.453023	0.47215	0.563966
1.8	0.425242	0.391351	0.413418	0.512438
2	0.370234	0.332848	0.358032	0.462332
2.2	0.31869	0.278112	0.306551	0.413927
2.4	0.271018	0.227721	0.259476	0.367502
2.6	0.227545	0.182208	0.217212	0.323329
2.8	0.18849	0.142023	0.180029	0.281655
3	0.143955	0.107501	0.148027	0.242696
3.2	0.123918	0.078823	0.121109	0.206624
3.4	0.088239	0.055982	0.098964	0.173554
3.6	0.06667	0.038753	0.081069	0.143536
3.8	0.058882	0.026666	0.066707	0.116553
4	0.033043	0.018998	0.055013	0.09251
4.2	0.031482	0.014772	0.045054	0.071243
4.4	0.024129	0.012791	0.03592	0.052526
4.6	0.017317	0.011692	0.026858	0.036077
4.8	0.012211	0.010045	0.017398	0.021588
5	0.008458	0.006501	0.007485	0.00874

Table 3, are the results for energy profile $\theta(\eta)$ for the pressure gradient parameter $m = 0$ when Prandtl number $Pr = 1$ at $\eta_\infty = 5.15$. Thus it is seen in the second and fourth columns of Table 3, are in close agreement with those published previously in Fathizadeh and Rashidi [1] in the third column. The fifth column are the results of $\theta(\eta)$ taking $m = 0$ When $Pr = 0.5$ at $\eta_\infty = 5.15$. Note that the second and third columns have been taken same as in [1].

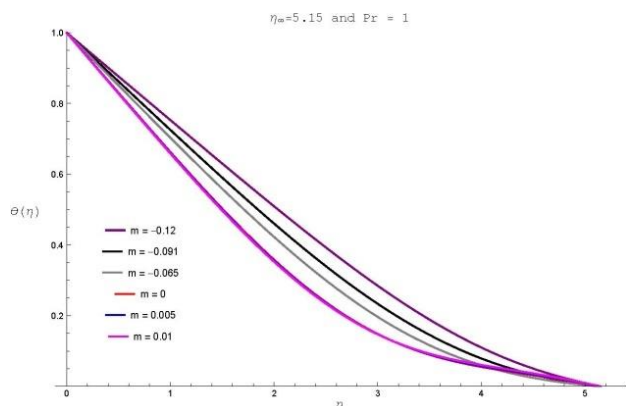


Figure 3 Energy profile for $\theta(\eta)$ for $-0.12 \leq m \leq 0.01$ when $\eta_\infty = 5.15$ and $Pr = 1$

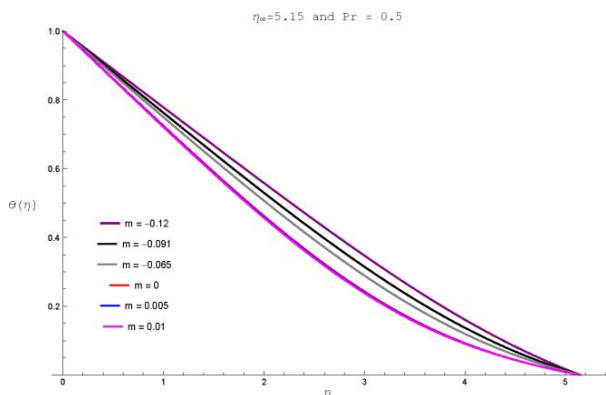


Figure 4 Energy profile for $\theta(\eta)$ for $-0.12 \leq m \leq 0.01$ when $\eta_\infty = 5.15$ and $Pr = 0.5$

Figures 3 and 4 show that the temperature profiles decrease with increasing m and hence the thermal boundary layer thickness becomes thinner and thinner. Where as in comparison of above figures, 3 have taken with $Pr = 1$ and 4 have taken with $Pr = 0.5$ which shows the thermal boundary layer thickness is more thinner with the higher value of Pr .

4.0 CONCLUSION

In this work we have calculated more values of velocity (i.e f_0, f_1, f_2, f_3 and f_4) for the better approximation of the system. The energy and momentum equations with pressure gradient are solved with an application of HPM using algorithms of Adams and Gear methods. The results generated are found to be in good agreement with those results

which are numerically acquired. Using HPM technique, for velocity profile the range of admissible pressure gradient (m) was -0.11 to 0.02 (i.e. $-0.11 \leq m \leq 0.02$). For velocity and energy profiles of the value η_∞ have been taken to be 5.25 and 5.15 when the Prandtl numbers (Pr) are 1 and 0.5 , for energy profile the range of pressure gradient (m) has obtained as -0.12 to 0.01 (i.e. $-0.12 \leq m \leq 0.01$). The momentum and thermal boundary layer thicknesses decrease with an increase in the value of pressure gradient. It could be interesting in future work to have a comparison and validation of this work with another approximation method known as Variational Iteration Method (VIM).

Acknowledgement

This research is being partially supported by the research grant under MOHE, FRGS project VoTNo.R.J130000.7809.4F354. The first author, Amber Nehan Kashif is fully supported by Federal Urdu University of Arts, Sciences & Technology (FUUAST) Karachi, Pakistan under the Faculty Development Program (FDP) of Higher Education Commission (HEC) of Pakistan.

References

- [1] Fathizadeh, M. and Rashidi, F. 2009. Boundary Layer Convective Heat Transfer with Pressure Gradient using Homotopy Perturbation Method (HPM) over a Flat Plate. *Chaos, Solitons & Fractals*. 42(4): 2413-2419.
- [2] Matthew, B., Olyvia, D., Viral, P., Joel, S. and Van, B. E. 2007. Adams and Gear Methods for Solving ODEs with Mathematica. http://controls.engin.umich.edu/wiki/index.php/Solving_ODEs_with_Mathematica.
- [3] Shagaiya, Y. and Daniel, S. 2015. Presence of Pressure Gradient on Laminar Boundary Layer over a Permeable Surface with Convective Boundary Condition. *Am. J. Heat Mass Transf.* 2(1): 1-14.
- [4] Aminikhah, H. and Jamalian, A. 2012. An Analytical Approximation for Boundary Layer Flow Convection Heat and Mass Transfer Over a Flat Plate. *J. Math. Comput. Sci.* 5(4): 241-257.
- [5] Aziz, A. 2009. A Similarity Solution for Laminar Thermal Boundary Layer over a Flat Plate with a Convective Surface Boundary Condition. *Commun. Nonlinear Sci. Numer. Simul.* 14(4): 1064-1068.
- [6] Mirgolbabaei, H. and Barari, A. 2010. Analytical Solution of Forced-convective Boundary-layer Flow over a Flat Plate. *Arch. Civ. Mech. Eng.* X(2): 41-51.
- [7] Jiya, M. and Oyubu, J. 2012. Adomian Decomposition Method for the Solution of Boundary Layer Convective Heat Transfer Flow over a Flat Plate. *Int. J. Appl.* 2(8): 54-62.
- [8] Fathizadeh, M. and Aroujalian, A. 2012. Study of Boundary Layer Convective Heat Transfer with Low Pressure Gradient Over a Flat Plate Via He's Homotopy Perturbation Method. *Iran. J. Chem. Eng.* 9(1): 33-39.
- [9] Esmailpour, M. and Ganji, D. D. 2007. Application of He's Homotopy Perturbation Method to Boundary Layer Flow and Convection Heat Transfer over a Flat Plate. *Phys. Lett. A.* 372: 33-38.
- [10] Desale, S. V. and Pradhan, V. H. 2013. Implicit Finite Difference Solution of Boundary Layer Heat Flow over a Flat Plate. *Int. J. Eng. Res. Appl.* 3(6): 1611-1616.

- [11] Mukhopadhyay, S. 2013. MHD Boundary Layer Flow and Heat Transfer over an Exponentially Stretching Sheet Embedded in a Thermally Stratified Medium. *Alexandria Eng. J.* 52(3): 259-265.
- [12] Biliana, B. and Roslinda, N. 2009. Numerical Solution of the Boundary Layer Flow over an Exponentially Stretching Sheet with Thermal Radiation. *Eur. J. Sci. Res.* 33(4): 710-717.
- [13] Bhattacharyya, K. 2011. Dual Solutions in Boundary Layer Stagnation-Point Flow and Mass Transfer with Chemical Reaction Past a Stretching/Shrinking Sheet. *Int. Commun. Heat Mass Transf.* 38(7): 917-922.
- [14] Bhattacharyya, K. 2011. Boundary Layer Flow and Heat Transfer over an Exponentially Shrinking Sheet. *Chinese Phys. Lett.* 28(7): 074701.
- [15] Ishak, A. 2010. Similarity Solutions for Flow and Heat Transfer Over a Permeable Surface with Convective Boundary Condition. *Appl. Math. Comput.* 217(2): 837-842.
- [16] He, J. H. 2006. Some Asymptotic Methods for Strongly Nonlinear Equations. *Int. J. Mod. Phys. B.* 20(10): 1141-1199.
- [17] He, J. H. 2006. New Interpretation of Homotopy Perturbation Method. *Int. J. Mod. Phys. B.* 634-638.
- [18] He, J. H. 2008. An Elementary Introduction to Recently Developed Asymptotic Methods and Nanomechanics in Textile Engineering. *Int. J. Mod. Phys. B.* 22(21): 3487-3578.
- [19] Cai, X. , Wu,W. and Li, M. 2006. Approximate Period Solution for a Kind of Nonlinear Oscillator by He's Perturbation Method. *Int. J. Nonlinear Sci.* 7(1): 109-112.
- [20] Cveticanin, L. 2006. Homotopy-perturbation Method For Pure Nonlinear Differential Equation. *Chaos, Solitons & Fractals.* 30: 1221-1230.
- [21] El-Shahed, M. 2005. Application of He's Homotopy Perturbation Method to Volterra's Integro-differential Equation. *Int. J. Nonlinear Sci.* 6(2): 163-168.
- [22] Abbasbandy, S. 2006. Application of He's Homotopy Perturbation Method for Laplace Transform. *Chaos, Solitons & Fractals.* 30: 1206-1212.
- [23] Beléndez, A. and Hernandez, A. 2007. Application of He's Homotopy Perturbation Method to the Duffing-harmonic Oscillator. *Int. J. Nonlinear Sci. Numer. Simul.* 8(1): 79-88.
- [24] He, J. H. 1999. Homotopy Perturbation Technique. *Comput. Methods Appl. Mech. Eng.* 178(3-4): 257-262.
- [25] He, J. H. 1998. Approximate Solution of Nonlinear Differential Equations with Convolution Product Nonlinearities. *Comput. Methods Appl. Mech. Engrg.* 167: 69-73.
- [26] Mahmood, M. and Hossain, M. 2008. Application of homotopy Perturbation Method to Deformable Channel With Wall Suction and Injection in a Porous Medium. *Int. J. Nonlinear Sci. Numer. Simul.* 9(2): 195-206.
- [27] Ghori, Q., Ahmed, M. and Siddiqui, A. 2007. Application of Homotopy Perturbation Method to Squeezing Flow of a Newtonian Fluid. *Int. J. Nonlinear Sci. Numer. Simulation.* 8(2): 179-184.
- [28] Yulita Molliq, R., Noorani, M. S. M. and Hashim, I. 2009. Variational Iteration Method for Fractional Heat-and Wave-like Equations. *Nonlinear Analysis: Real World Applications.* 10(3): 1854-1869.
- [29] Cebeci, T. and Bradshaw, P. 1988. *Physical and Computational Aspects of Convective Heat Transfer.* New York: Springer-Verlag.
- [30] Kakaç, S. and Yener, Y. 1980. *Convective Heat Transfer.* Middle East Technical University: Faculty of Engineering.
- [31] Abbas, Z., Wang, Y., Hayat, T. and Oberlack, M. 2010. Mixed convection in the Stagnation-point Flow of a Maxwell Fluid Towards a Vertical Stretching Surface. *Nonlinear Anal. Real World Appl.* 11(4): 3218-3228.
- [32] Bird, B. R., Stewart, W. E. and Lightfoot, E. N. 2002. *Transfer Phenomena.* 2nd ed. John Wiley & Sons.