

GRAPHICAL USER INTERFACE FOR ASSESSING SUSTAINABILITY BY USING FUZZY LOGIC: A CASE STUDY ON HOLLOW FIBER MEMBRANE MODULE

Salwa Mahmood^{a*}, Abdul Rahman Hemdi^b, Muhamad Zamari Mat Saman^a, Noordin Mohd Yusof^a

^aFaculty of Mechanical Engineering, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia
^bFaculty of Mechanical Engineering, Universiti Teknologi Mara, 13500 Permatang Pauh, Pulau Pinang, Malaysia


Article history

Received
21 January 2015
Received in revised form
24 March 2015
Accepted
1 August 2015

*Corresponding author
salwamahmood@gmail.com

Graphical abstract

$$\mu_A(x) = \begin{cases} 0 & \text{if } x \leq a_1 \\ \frac{(x-a_1)}{(a_2-a_1)} & \text{if } a_1 \leq x \leq a_2 \\ \frac{(a_2-x)}{(a_2-a_1)} & \text{if } a_2 \leq x \leq a_3 \\ 1 & \text{if } x \geq a_3 \end{cases}$$



Abstract

An important consideration during product development is the sustainability level of a product. Thus, several tools and methods have been developed to assess product sustainability. However, most of current tools focus only on the environmental element without considering two important sustainability elements such economic and social elements. Other tools are limited to the cradle-to-gate system boundary, which covers two phases of the product life cycle from raw material extraction to the end of the manufacturing stage. Users need to understand the mathematical calculations and tools needed to achieve this purpose. Hence, this paper developed a comprehensive method for assessing the sustainability of product development considering all sustainability elements from cradle-to-grave. A graphical user interface (GUI) was developed for ease of use from the structured methodology. The developed GUI was embedded with the fuzzy logic calculation under the Matlab GUI platform with codes and callback functions by using fuzzy linguistics. The GUI presented is a user friendly assessment since users no need to understand the mathematical equation embedded. A product was selected as a case study to demonstrate the use of the GUI. The sustainability level of a product can be monitored via the GUI to enable further product sustainability improvement.

Keywords: Graphical user interface, artificial intelligence, sustainability assessment, fuzzy logic, hollow fiber membrane

Abstrak

Tahap kemampunan sesuatu produk merupakan pertimbangan yang penting dalam pembangunan produk. Beberapa kaedah telah dibangunkan untuk menilai tahap kemampunan produk. Namun, kebanyakan kaedah yang telah dibangunkan hanya memberikan tumpuan terhadap unsur alam sekitar sahaja tanpa mengambil kira dua lagi elemen penting dalam kelestarian iaitu elemen ekonomi dan elemen social. Selain itu, terdapat kaedah hanya meliputi sebahagian fasa kitaran produk yang merangkumi daripada pengekstrakan bahan mentah hingga proses pembuatan sahaja. Pengguna juga perlu memahami pengiraan matematik secara manual bagi tujuan mendapatkan tahap kemampunan produk. Oleh itu, artikel ini membangunkan kaedah komprehensif untuk menilai tahap kemampunan merangkumi fasa produk yang lebih luas dan mengambil kira semua elemen penting kelestarian. *Graphical User Interface* (GUI) telah dibangunkan untuk memudahkan penggunaan kaedah yang dibangunkan ini. Di dalam GUI ini, formula serta pengiraan menggunakan pendekatan *fuzzy logic* telah disematkan melalui linguistik *fuzzy logic*. GUI ini adalah penilaian tahap kemampunan yang mesra pengguna kerana pengguna tidak perlu memahami formula matematik yang rumit. Satu produk telah dipilih

untuk demonstrasi penggunaan GUI ini. Daripada penggunaan GUI ini, tahap kemampanan boleh dipantau bagi menjana peningkatan tahap kemampanan sesebuah produk.

Kata kunci: Graphical user interface, artificial intelligence, penilaian kemampanan, fuzzy logic, membran berongga

© 2015 Penerbit UTM Press. All rights reserved

1.0 INTRODUCTION

Sustainability assessment has become an important indicator for the level of sustainability of a product. Over the years, research on sustainability assessment has grown rapidly both at the national and international levels. The purpose of sustainability assessment is to evaluate the product and assist decision makers to form decisions for a sustainable society [1]. Sustainability assessment is related closely with the methodology for identifying sustainability parameters on the basis of sustainability context and coverage. The proper identification of sustainability parameters is necessary to evaluate the product performance and monitor improvements at three levels, namely, environmental, economic, and social.

Sustainability assessment involves the evaluation of quantitative and qualitative data. For quantitative evaluation, the determined parameter becomes the main feature and serves as an important indicator of life cycle performance. Quantitative data will be collected for the next evaluation process. On the other hand, qualitative indexes depend heavily on the knowledge and experience of field experts. Therefore, the parameters involved are frequently indicated as subjective perspective and interpretation. The qualitative evaluation concept may differ with another assessment because it involves human

interpretation, knowledge, and experiences [2, 3]. Several examples of tools for sustainability assessments have been developed. However, some of these tools focus only on several sustainability dimensions. Several tools do not consider the balance between all sustainability elements involved. Furthermore, several tools have limited system boundary. This paper presents a graphical user interface (GUI) for assessing sustainability by the fuzzy logic approach via Matlab. The GUI provides application guidelines and a case study for methodology validation. Life cycle assessment (LCA) was applied to determine the parameters at every phase of the product lifecycle for the case study on hollow fiber membrane module [4].

User interface design has become an important tool for expert systems for the past 10 years. The user interface of an expert system is usually introduced in a complicated or fuzzy real application [5]. Several examples of tools developed by using different calculation methods can be found in literature. The developed tools varied depending on the case study selected. Table 1 provides a summary of the various published assessment methods. However, several tools had vague details on their guidelines, whereas some tools were unsuitable for application to other case studies.

Table 1 Summary of sustainability assessment web-tool developed

Author/s	Sustainability assessment web-tool developed
[6]	This study developed multi-criteria decision analysis (MCDA) methodology software for determining product end-of-life (EOL) treatment options. EOL options that need to be chosen include reuse, remanufacture, recycling, incinerated, landfill, or special handling. This study focused on the EOL product lifecycle stage to reduce environmental impact by using MCDA and analytic hierarchy process (AHP), which is a software used to determine product EOL option on the basis of Visual Basic software and aid in the decision-making process.
[7]	This study proposed a new approach for applying the Product Sustainability Index (ProdSI) to select the best possible configuration design. The use of ProdSI can enable the improvement of the initial product design and increase the sustainable options before the selection of the final design. An armchair was selected as a case study to illustrate the proposed approach. This study focused on the initial design phase for product design. However, the software for this method is still in the development phase.
[8]	This study presented a GUI for assessing sustainability by using Matlab-fuzzy software to alleviate the mathematical operation in fuzzy logic. This study presented the three dimensions for sustainability: environmental, economic, and social elements. This GUI also considered the cradle-to-gate system boundary. An automotive component case study was selected to validate the developed GUI.
[9]	This study developed a software application for selecting indicators and allocating weighting to indicators and sub-indexes. The GUI combined the Delphi process, AHP, and normalization method on the basis of Visual Basic software. Thirty-five indicators that focus on health and environmental aspects were selected. A case study conducted in Quang Tri Province, Vietnam, was used to validate the tools.

Author/s	Sustainability assessment web-tool developed
[10]	This study presented a software tool that applies a scoring system to guide the most efficient solutions for responsible authorities. The data inputs need to be collected and the outcome is the ranking of alternative scenarios that need to be selected. This software was developed specifically for the urban wastewater treatment process.
[11]	This study developed a systematic approach for decision analysis by using Java and AHP. The software applied the AHP methodology for MCDA. This software was deployed on the World Wide Web and can be accessed globally. This program focused on natural resources and environmental management.
[12]	This study developed a computer simulation model for sustainability and applied the Visual Basic software for the simulation. The model focused on environmental and social elements related to human population growth, pollution, waste treatment, and ozone levels.

2.0 GUI METHODOLOGY

A fabrication product-related assessment tool was created by developing a GUI that evaluated the resources consumed and the potential environmental impact during the product chain in the product life cycle. To balance sustainability, the developed GUI integrates three pillar of sustainability, considering three dimensions or element of environmental, social and economical. For environmental aspect, the potential environmental impacts should be reduced, the price should be optimized for economical aspects while reduce fatalities and improve the human health, safety and ergonomic for social aspect. All three aspects were considered from the cradle to the grave, and accounts for the raw material extraction, fabrication, transportation, usage, and EOL phases. Four potential environmental impacts were considered for the environmental element (global warming potential (GWP), acidification potential (AP), eutrophication potential (EP), and waste potential (WP)). Four potential impacts on the economic element, including material potential, energy potential, price potential, and maintenance potential, were also considered. In terms of the social element, four impacts were considered human health potential, heavy metal potential, carcinogen potential, and risk potential. Figure 1 shows the potential impacts considered with the parameter determination by [13] whereas Table 2 shows the fuzzy sustainability of the GUI evaluation for the diagram definition, including inputs, processing, and outputs for GUI development. Expert opinions were used to validate the selected parameters before developing the GUI by using Matlab [14].

Fuzzy logic was applied in the development of the GUI to assess product sustainability. Fuzzy logic was used in instances of uncertain and incomplete relationships among parameters [15]. A fuzzy inference system (FIS) refers to the process of formulating the mapping from a given input to an output by using a fuzzy logic process. The FIS was applied in this GUI. The fuzzy logic process consists all of membership functions, logical operation, and fuzzy rules. The output from the developed GUI developed will be determined in terms of the sustainability index. The index value range is from zero to one by Eq. (1). "Zero"

indicates the lowest sustainability level of product, whereas "one" indicates the highest sustainability level [16]. The framework developed can be applied for another product lifecycle. However, this paper focused on the product lifecycle of a hollow fiber membrane (Mahmood et al., 2014).

$$\mu_A(x) = \begin{cases} 0 & \text{if } x \leq a_1 \\ \frac{(x-a_1)}{(a_2-a_1)} & \text{if } a_1 \leq x \leq a_2 \\ \frac{(a_3-x)}{(a_3-a_2)} & \text{if } a_2 \leq x \leq a_3 \\ 1 & \text{if } x \geq a_3 \end{cases} \quad (1)$$

where $A = (a_1, a_2, a_3)$, a_1 = minimum value, a_3 = maximum value, and $a_2 = (a_1 + a_3)/2$ for the symmetric triangle.

Figure 2 shows the general flow chart of the GUI when used to assess sustainability. The flow chart describes the evaluation process of the developed GUI in assessing three elements of sustainability. During the evaluation, users need to enter the parameter input data for each sustainability element. After data have been entered, the total input data, potential sustainability index I , and lifecycle index for each element will be evaluated. Hence, the sustainability index for each element will be displayed for users. Users can also view the methodology, legislation, and user guide to aid in further understanding the methodology developed, legislation requirements, and user guidance.

Figure 3 shows the main menu of the GUI. At the main page, users can select options before starting the evaluation. Four pushbuttons were developed, including METHODOLOGY, LEGISLATION, USER GUIDE, and EVALUATION. The METHODOLOGY pushbutton allows users to understand the methodology developed according to parameters involved. The LEGISLATION pushbutton is used to provide information regarding the legislation requirement on sustainability issues. The USER GUIDE pushbutton explains the steps for using the proposed GUI. Finally, the EVALUATION pushbutton will proceed to the sustainability assessment page and will initiate the environmental, social, economic, and overall sustainability assessment.

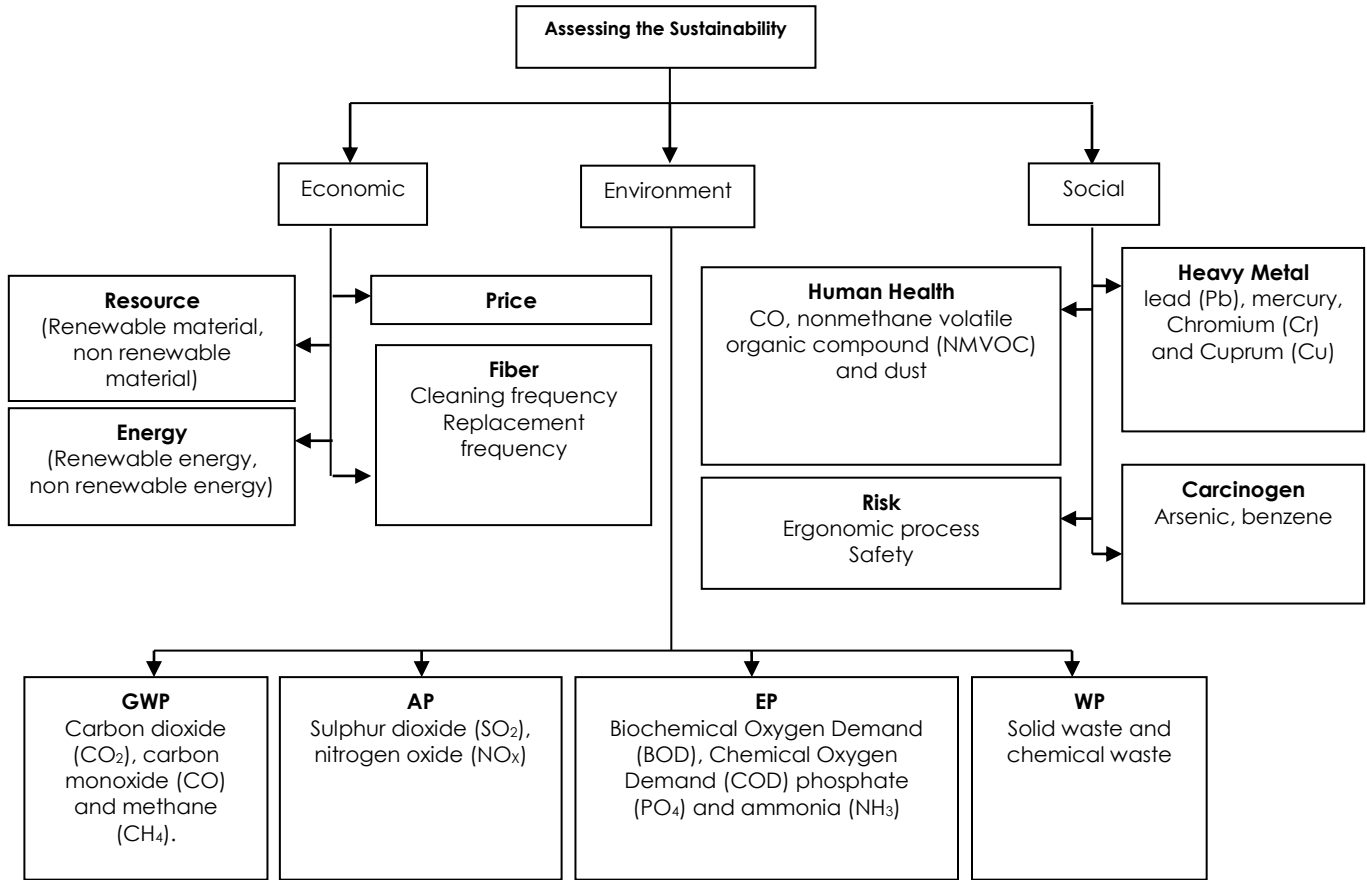


Figure 1 Potential impacts considered with parameter determination

Table 2 Input, processing and outputs of GUI

Inputs	Parameters/ potential impacts considered 1. Environmental aspect -CO ₂ , CO and CH ₄ -SO ₂ and NO _x -BOD, COD, PO ₄ and NH ₃ -Solid waste and Chemical waste 2. Social aspect -CO, NMVOC and dust -Pb, Hg, Cr and Cu -Arsenic and Benzene -Ergonomic process and safety 3. Economical aspect -Renewable material and non-renewable material -Renewable energy and non-renewable energy -Price -Fiber cleaning frequency and fiber replacement frequency
Processing	1. Computation of total inputs/parameters 2. Computation of potential index -Environmental index -Economical index -Social index 3. Computation of life cycle index for environmental, economical and social aspects. 4. Computation of overall sustainability index
Outputs	1. Total amount of inputs/ parameters 2. Sustainability indices for each product life cycle 3. Overall sustainability index

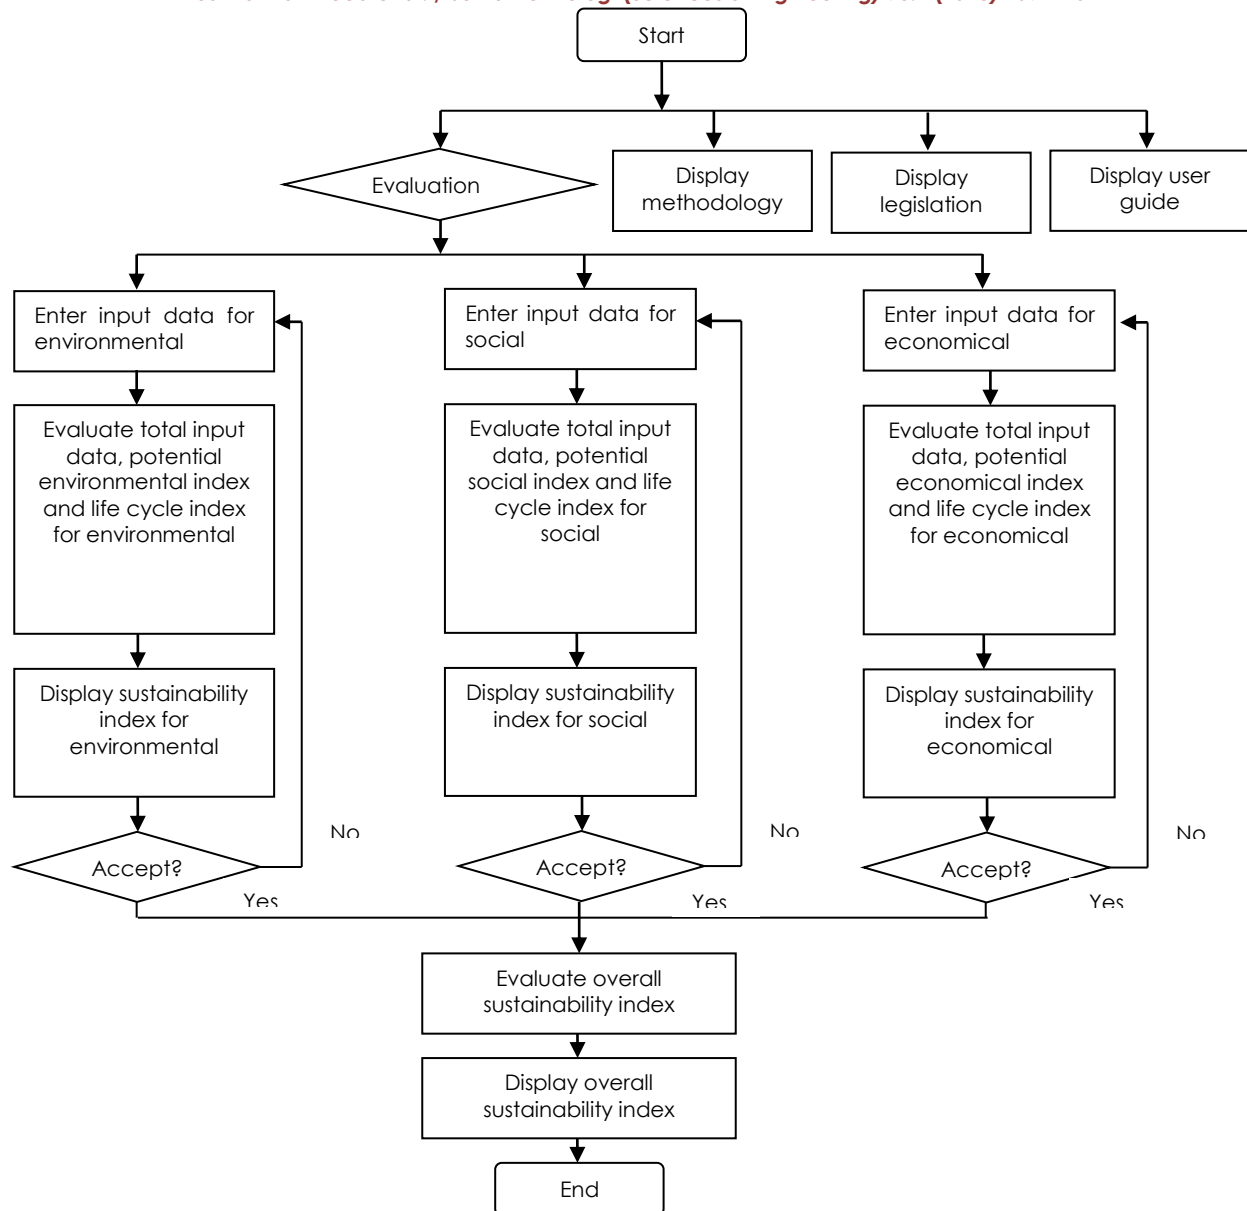


Figure 2 General flow chart of fuzzy based sustainability assessment evaluation

The sustainability assessment starts after the EVALUATION pushbutton is clicked. The assessment tool GUI for the environmental page will then appear as shown in Figure 4. Thereafter, users will have to enter the amount of the input parameters: CO₂, CO, and CH₄ for GWP; SO₂ and NO_x for AP; PO₄, BOD, COD, and NH₃ for EP; solid waste and chemical waste for WP. The reference values that will be used at every phase of the lifecycle will originate from material extraction, fabrication, transportation, usage, and EOL. The reference value is an important factor in fuzzy calculation for obtaining the sustainability indices. After loading all input data, the environmental sustainability indices (I_{GWP} , I_{AP} , I_{EP} and I_{WP}) for every phase of the lifecycle will be calculated by pressing the CALCULATE pushbutton. Finally, the user can either SAVE the results, return to the main menu by clicking the MAIN MENU pushbutton or proceed to the next

evaluation (social element) by clicking the NEXT pushbutton.

The GUI for assessing the social element is shown in Figure 5. To assess the social sustainability, users need to enter the amounts and reference values of CO, NMVOC, and NH₄ for human health potential, Pb, Hg, Cr and Cu for heavy metal potential, and arsenic and benzene for carcinogens potential. For the risk, users need to select the level of safety and ergonomics on the basis of their knowledge and experience. The social sustainability indices ($I_{human\ health}$, $I_{heavy\ metal}$, $I_{carcinogen}$, and I_{risk}) for every phase in the lifecycle will be measured by pressing the CALCULATE pushbutton. The user can record the results or return to the main menu if they are not satisfied with the results. The user can either SAVE the results, return to the main menu by clicking the MAIN MENU pushbutton, or proceed to the next evaluation of the sustainability element (economic element) by clicking the NEXT pushbutton.

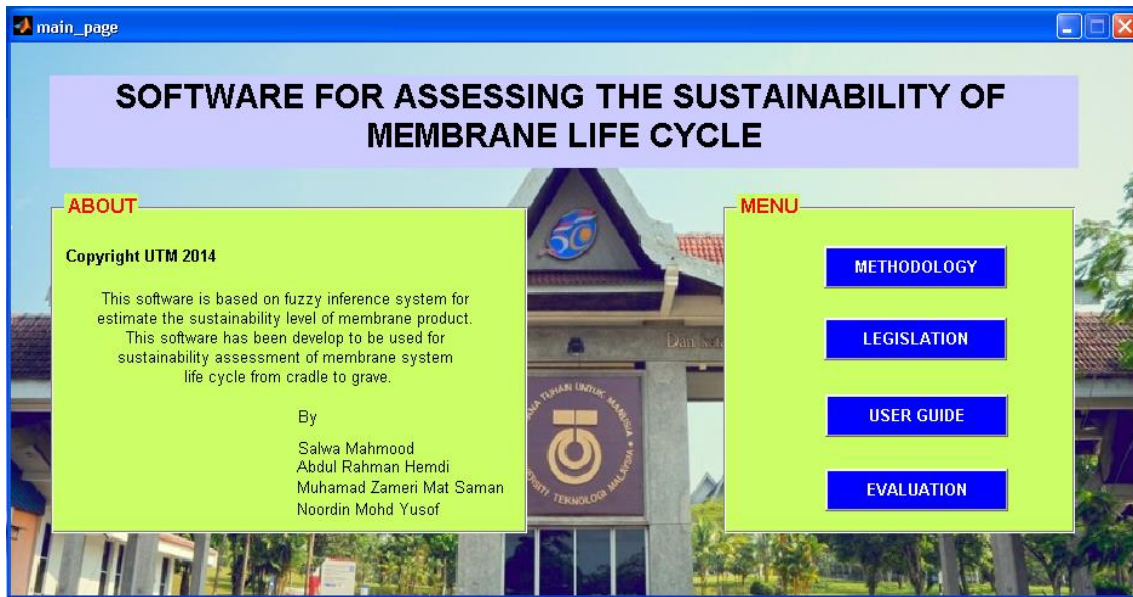


Figure 3 Main menu of GUI

The measurement of the economic element can be obtained through the GUI shown in Figure 6. Users need to enter the amounts and reference values of renewable and non-renewable materials, renewable and non-renewable energy at each life cycle stage to obtain the economic sustainability indices (I_{material} , I_{energy} , I_{price} , and $I_{\text{maintenance}}$) for every life cycle phase. In this study, the input data for environmental, social, and economic elements are gathered from several certified databases such as the European Life Cycle Database and PE by using the GaBi 6 Software System and the Databases for Life Cycle Engineering [17]. Similar to the process in the previous pages, users can either SAVE the results, return to the main menu by clicking the MAIN MENU pushbutton, or proceed to the next overall sustainability evaluation of the sustainability element by clicking the NEXT pushbutton. The lifecycle index (LCI_index) will be referred to as the average index for every life cycle phase to obtain the environmental index I_{env} by Eq. (2). The calculation is similar for the social index I_{soc} by Eq. (3) and economic index I_{eco} by Eq. (4).

The equal weightage value for each sustainability element is applied because the goal of the study is to

balance all elements toward sustainability. The user will be able view the overall sustainability assessment by pressing the NEXT button in the economic assessment page as shown in Figure 7. The overall sustainability index is the average of all sustainability elements measured in the previous assessment. The values of the environmental, social, and economic indexes will be used to obtain the overall sustainability index. The value of the environmental index I_{env} , social index I_{soc} , and economic index I_{eco} can be obtained at the bottom of every assessment elements page.

Users need to load the index for each element (i.e., I_{env} , I_{soc} and I_{eco}) and click the CALCULATE pushbutton to obtain the overall sustainability index by referring Eq. (5). The index value determines the level of product sustainability by considering all sustainability elements from the cradle-to-grave process. Hence, users can monitor the sustainability level at every lifecycle stage and plan for improvement toward sustainability. Users can either save the work by clicking the SAVE pushbutton or close the assessment by clicking the CLOSE pushbutton.

$$I_{\text{env}} = \frac{(LCI_{\text{material}} + LCI_{\text{fabrication}} + LCI_{\text{transport}} + LCI_{\text{usage}} + LCI_{\text{EOL}})_{\text{env}}}{5} \quad (2)$$

$$I_{\text{soc}} = \frac{(LCI_{\text{material}} + LCI_{\text{fabrication}} + LCI_{\text{transport}} + LCI_{\text{usage}} + LCI_{\text{EOL}})_{\text{soc}}}{5} \quad (3)$$

$$I_{\text{eco}} = \frac{(LCI_{\text{material}} + LCI_{\text{fabrication}} + LCI_{\text{transport}} + LCI_{\text{usage}} + LCI_{\text{EOL}})_{\text{eco}}}{5} \quad (4)$$

$$I_{\text{sustainability}} = \frac{\sum_{j=1}^n w_j I_j}{n} = \frac{(w_{\text{env}} I_{\text{env}} + w_{\text{soc}} I_{\text{soc}} + w_{\text{eco}} I_{\text{eco}})}{3} \quad (5)$$

AssessingTool_Environment

	Material extraction	Fabrication	Transportation	Usage	End-of-Life	TOTAL	MinValue	MaxValue
GLOBAL WARMING POTENTIAL								
Carbon monoxide, CO (kg/unit)	0	0	0	0	0		0	10
Carbon dioxide, CO2 (kg/unit)	0	0	0	0	0		0	10
Methane, CH4 (kg/unit)	0	0	0	0	0		0	10
ACIDIFICATION POTENTIAL								
Sulphur dioxide, SO2 (kg/unit)	0	0	0	0	0		0	10
Mono-nitrogen oxide, NOX (kg/unit)	0	0	0	0	0		0	10
EUTROPHICATION POTENTIAL								
Phosphorus, PO4 (kg/unit)	0	0	0	0	0		0	10
BOD (kg/unit)	0	0	0	0	0		0	10
COD (kg/unit)	0	0	0	0	0		0	10
Ammonia, NH3 (kg/unit)	0	0	0	0	0		0	10
WASTE POTENTIAL								
Solid waste (kg/unit)	0	0	0	0	0		0	10
Chemical waste (kg/unit)	0	0	0	0	0		0	10
POTENTIAL ENVIRONMENTAL INDEX								
	Material extraction	Fabrication	Transportation	Usage	End-of-Life			
Global Warming Potential Index								
Acidification Potential Index								
Eutrophication Potential Index								
Waste Potential Index								
LIFE CYCLE INDEX								

Env_index

← [Progress Bar] →

MAIN MENU CALCULATE

SAVE NEXT

Figure 4 Page for assessing environmental sustainability

AssessingTool_socials

	Material extraction	Fabrication	Transportation	Usage	End-of-Life	TOTAL	MinValue	MaxValue
HUMAN HEALTH								
Carbon monoxide, CO (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
NM VOC (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Dust (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
HEAVY METAL								
Lead (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Mercury (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Chromium(kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Copper (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
CARCINOGEN								
Arsenic (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Benzene (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
RISK Panel								
Safety	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None			
Ergonomic	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None	<input type="radio"/> Good <input type="radio"/> Low <input type="radio"/> Average <input checked="" type="radio"/> None			
POTENTIAL SOCIAL INDEX								
	Material extraction	Fabrication	Transportation	Usage	End-of-Life			
Human Health Index	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>			
Heavy Metal Index	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>			
Carcinogen Index	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>			
Risk Index	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>			
LIFE CYCLE INDEX	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	Soc_index		

Figure 5 Page for assessing social sustainability

AssessingTool_Economics

	Materials extraction	Fabrication	Transportation	Usage	End-of-Life	TOTAL	MinValue	MaxValue
MATERIAL								
Renewable material (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Non-renewable material (kg/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
ENERGY								
Renewable energy (MJ/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Non-renewable energy (MJ/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
PRICE								
Approximate cost (RM/unit)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
MAINTENANCE								
Cleaning frequency (time)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
Replacement frequency (time)	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>	<input type="text" value="0"/>		<input type="text" value="0"/>	<input type="text" value="10"/>
POTENTIAL ECONOMICAL INDEX								
	Material extraction	Fabrication	Transportation	Usage	End-of-Life	Eco_index		
Material Potential Index								
Energy Potential Index								
Price Potential Index								
Maintenance Potential Index								
LIFE CYCLE INDEX								

Figure 6 Page for assessing economical sustainability

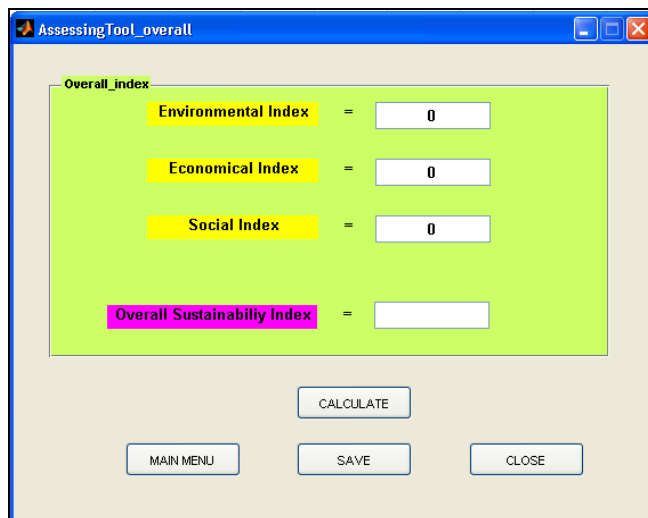


Figure 7 Page for assessing overall sustainability

3.0 CASE STUDY OF HOLLOW FIBER MEMBRANE MODULE

A product was selected for the case study to customize the developed GUI. The hollow fiber membrane module was selected as the product to be assessed. This case study was conducted on the membrane fabrication phase at the laboratory scale. The selection of the hollow fiber membrane module was based on high customer demand and the availability of required data. The hollow fiber membrane module have gained wide acceptance against competing technology in many areas because of its flexibility, performance reliability, environmental aspects, competitive cost, and increasing demand. The boundary analysis for this case study was conducted from the cradle to the grave.

After selecting a product, the required parameters were identified on the basis of the potential impact for each sustainability element, as mentioned in the previous section. The data were obtained from a number of sources. Primary data were obtained from laboratory experiments and initial findings, and data from previous studies were used if data could not be obtained from primary sources. For this case study, expert opinions were used to validate the selected parameters before developing the GUI. Table 3 shows the input parameters for the hollow fiber membrane module including the reference value for the fuzzy evaluation. For each sustainability aspect, the values of the data were collected from several available life cycle databases, such as the GaBi Database. The values of each parameter were calculated on the basis of the lifecycle time at each life cycle phase.

Take the fabrication process as an example for data collection, the energy from electricity will be taken into consideration. Three processes are involved in the fabrication process of a hollow fiber

membrane module, including the mixing process, phase inversion process, and potting process. The power required for the fabrication process is assumed 30 W [18, 19]. Given that the stirring process of the polymer resin and solvent take one day (equal to 86400 s) for the completion of the dope solution, the required energy will be 2.592 MJ. For the phase inversion process, energy from electricity was calculated from the power consumptions of the gear pump, refrigeration unit, and wind-up drum. The amount of power at 30 W was measured for all electrical units during the phase inversion process. Thousands of threads (bundles) of hollow fibers were needed to produce one unit of a hollow fiber membrane module [18]. A hollow fiber membrane module contains an estimated 2500 threads. According to the data collected from the laboratory, a 250 mL dope solution requires 120 min (7200 s) to produce 1200 m hollow fibers.

Figure 8 shows that the U-length of one hollow fiber is 110 cm and that 2750 m of hollow fiber is necessary to produce one unit of hollow fiber membrane module. This amount requires a 573 mL dope solution at 275 min (16500 s). The time required for both refrigeration unit and wind-up drum is 16500 s. One thread of hollow fiber (U-length) requires 110 cm fiber; hence, 2500 hollow fiber threads requires 275000 cm. Hence, the calculation of the required electricity for the gear pump, refrigeration unit, and wind drum are shown. From the measurement, 30 L (30 kg) of water will be consumed at the water bath during the fabrication phase. Approximately 10 L of methanol will be used for fiber treatment during the fabrication process. Table 4 shows the ratio of the dope solution, time, and length of hollow fiber membrane module.

No electrical energy was required for the potting process. However, at this stage of the fabrication process, data for the epoxy resin and stainless steel of the module were considered. The measurements indicate that 1.05 kg of epoxy was needed for the potted fiber and 3.4970 kg for the stainless steel of the module. By using the GaBi database, the parameters necessary to produce 1 MJ of heat, 1 MJ of electricity, 1 kg of epoxy, 1 kg of stainless steel, and 1 kg of water could be obtained. The parameter values for the fabrication phase are as follows: 2.592 MJ for the stirring process, 0.495 MJ for the gear pump, 0.495 MJ for the refrigeration unit, 0.495 MJ for the wind-up drum, 1.05 kg for the epoxy resin, 3.5 kg for the stainless steel, 30 kg for the tap water, and 10 L for the methanol.

The value of the parameters can be obtained from the GaBi database, including 5.49×10^{-2} kg of CO, 4.93×10^1 kg of CO₂, and 1.96×10^{-1} kg of CH₄ for GWP, during the fabrication process. Data for the other parameters can be obtained for each lifecycle phase of the membrane by using the same method. For the reference values, low and high parameter values will be assigned as the minimum and maximum values, respectively.

Table 3 Input parameters of hollow fiber membrane module

Element	Midpoints	Parameters	Life Cycle Phase					Normalization Limit value	
			Material	Fabrication	Transportation	Usage	EOL	Lowest	Highest
Environmental	GWP	CO (Kg)	1.13E-4	5.49E-2	2.65E-3	6.00E-5	1.82E-4	6.00E-5	5.49E-2
		CO ₂ (Kg)	1.81E-1	4.93E+1	6.86E-1	2.83E-2	3.51E-2	2.83E-2	4.93E+1
	AP	CH ₄ (Kg)	5.94E-4	1.96E-1	7.85E-3	8.64E-5	4.39E-4	8.64E-5	1.96E-1
		SO ₂ (Kg)	2.15E-4	2.99E-2	2.76E-3	5.71E-5	1.48E-4	5.71E-5	2.99E-2
		NO _x (Kg)	3.40E-6	1.19E-1	1.55E-3	2.15E-5	3.93E-9	3.93E-9	1.19E-1
	EP	PO ₄ (Kg)	1.76E-7	4.84E-6	2.84E-5	2.59E-5	6.82E-8	6.82E-8	2.84E-5
		BOD (Kg)	5.50E-6	3.33E-3	9.49E-6	7.29E-5	4.11E-6	4.11E-6	3.33E-3
		COD (Kg)	5.83E-5	3.27E-2	1.19E-4	9.78E-5	4.68E-6	4.68E-6	3.27E-2
		NH ₃ (Kg)	4.91E-6	5.68E-5	1.13E-3	1.89E-4	8.95E-7	8.95E-7	1.13E-3
	WP	Solid waste (Kg)	1.23E-3	4.16E-3	1.75E-2	3.57E-3	4.22E+0	1.23E-3	4.22E+0
Chemical waste (Kg)		2.29E-4	8.85E-2	1.23E-4	3.42E-4	1.66E-5	1.66E-5	8.85E-2	
Economical	Material	Renewable material (Kg)	1.24E-2	1.09E+0	4.39E-1	1.10E-3	4.17E-3	1.10E-3	1.09E+0
		Non renewable material	4.26E-1	3.30E+1	6.81E-1	8.63E-1	3.50E-1	3.50E-1	3.30E+1
	Energy (MJ)	Renewable energy	1.68E-2	2.88E+2	6.33E-2	1.51E+1	2.72E-1	1.68E-2	2.88E+2
		Non renewable energy	9.48E-1	1.12E+1	8.10E+1	3.55E-2	1.06E+0	3.55E-2	8.10E+1
	Price	Price (RM)	15.36	182.00	3.76	5.05E-1	0	0	182.00
	Maintenance	Fiber clean (times)	0	0	0	15	0	0	15
Fiber replacement (times)		0	0	0	1	0	0	1	
Social	Health	CO (Kg)	1.13E-4	5.49E-2	2.65E-3	6.00E-5	1.82E-4	6.00E-5	5.49E-2
		NMVOG (Kg)	3.25E-4	8.64E-3	4.64E-4	1.64E-6	4.93E-5	1.64E-6	8.64E-3
		Dust (Kg)	1.01E-5	5.88E-3	1.23E-5	5.19E-6	2.44E-6	2.44E-6	5.88E-3
	Heavy metal	Lead (Kg)	3.11E-8	6.79E-6	8.61E-7	1.20E-6	6.33E-9	6.33E-9	6.79E-6
		Mercury (Kg)	3.49E-10	4.62E-6	9.68E-10	2.10E-6	5.10E-10	5.10E-10	4.62E-6
		Chromium (Kg)	1.64E-9	8.23E-6	5.04E-7	1.52E-6	3.84E-9	1.64E-9	8.23E-6
		Copper (Kg)	4.01E-8	4.68E-6	3.10E-9	1.22E-6	1.31E-8	3.10E-9	4.68E-6
	Carcinogen	Arsenic (Kg)	1.34E-8	1.37E-6	3.35E-7	3.71E-6	3.79E-9	3.79E-9	3.71E-6
		Benzene (Kg)	2.98E-7	4.99E-6	1.17E-6	4.64E-8	7.66E-8	4.64E-8	4.99E-6
	Risk	Ergonomic							
Safety									

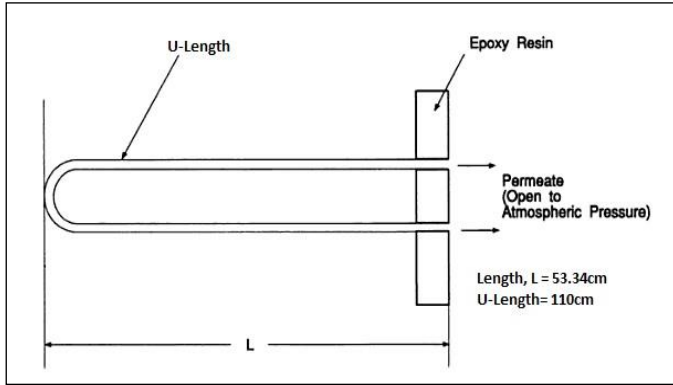


Figure 8 U-length diagram of hollow fiber membrane

Table 4 Input parameters of hollow fiber membrane module

Scenario	Hollow fibers (cm)	Dope solution (ml)	Time (s)
Data collected (ideal)	120000	250	7200
For producing 1 unit of hfmm	275000	275	16500

4.0 RESULT AND DISCUSSION

When a user enters data on the input parameters with reference values (refer Table 3), the index results for each sustainability aspect will be calculated by using the fuzzy logic approach. The results from the sustainability assessment for the environmental, social, and economical indexes for the hollow fiber membrane module are presented in the graphs in Figure 9, Figure 10 and Figure 11. The LCI_index will be referred to as the average index value of a certain phase in the lifecycle.

Figure 9 reveals that the fabrication process has the lowest index for the environmental aspect with an LCI_index of 0.2669 compared with another

phase of the lifecycle. This result can be attributed to the significant use of methanol during the treatment, electrification, and preparation of the hollow fiber membrane, thus resulting in the production of excessive amounts of CO₂ and SO₂. This process contributes to GWP and AP.

For the social fuzzy assessment shown in Figure 10, the fabrication process phase has the lowest sustainability performance with an LCI_index of 0.3512. This result is due to the significant use of electricity and the preparation of epoxy, which produces CO and NMVOC, thus causing harm to human health. Furthermore, the materials and chemicals used in the processes also release heavy metals and carcinogens. The value of these chemicals and carcinogens depend on the scale of the system boundary. In this case study, the fabrication process releases small amounts of heavy metals such as lead, mercury, chromium, and copper. Small amounts of carcinogens in the form of arsenic and benzene are also released.

The fabrication phase also has the lowest sustainability performance for the economic aspects with an LCI_index of 0.581. This result can be attributed to the high consumption of non-renewable materials and energy compared with the result of other lifecycle phases. When direct price was considered, the fabrication phase also has the highest price when compared with the price of other phases. Other phases contribute minimally to both material and energy potential impacts under the economic criteria.

In determining the overall sustainability performance, users can obtain the overall sustainability index for the hollow fiber membrane module by entering each sustainability index value. Figure 12 shows an overall index of 0.733 is obtained by averaging I_{env} , I_{soc} , and I_{eco} . The results obtained will enable the user to identify the weakness of the sustainability performance during each life cycle phase and determine the areas that require improvement.

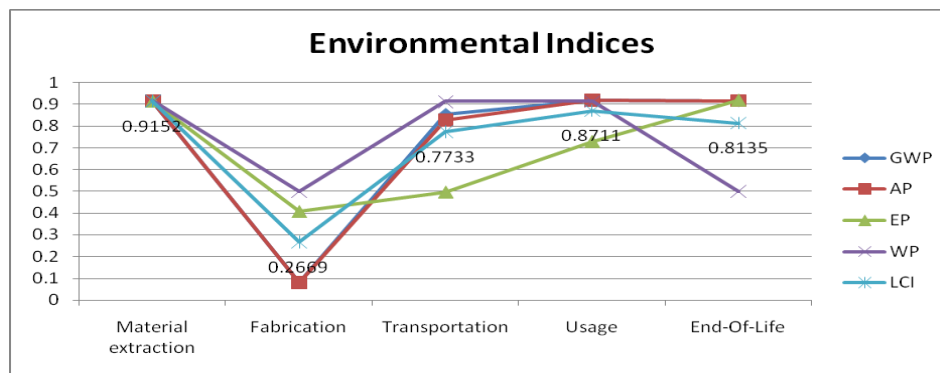


Figure 9 Result of environmental indices

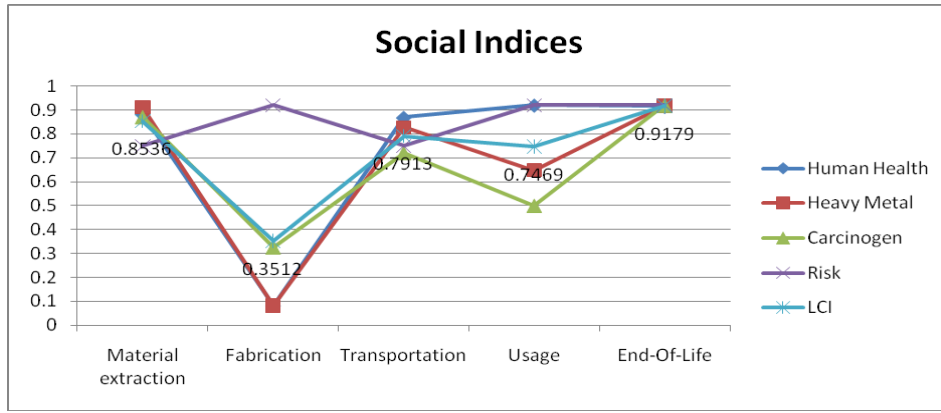


Figure 10 Result of social indices

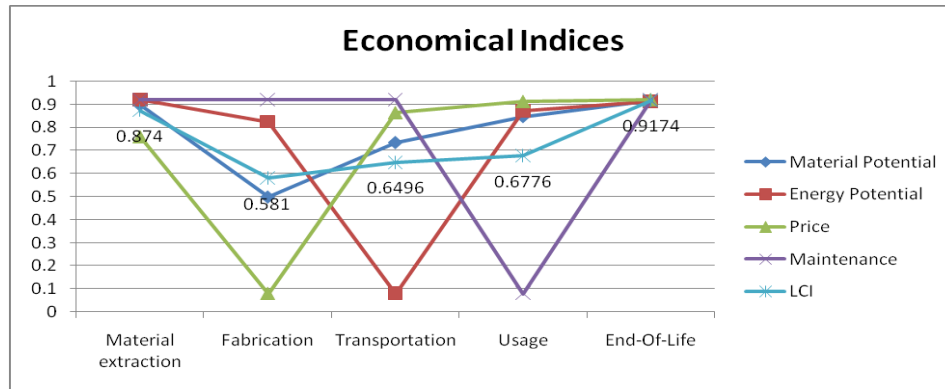


Figure 11 Result of economical indices

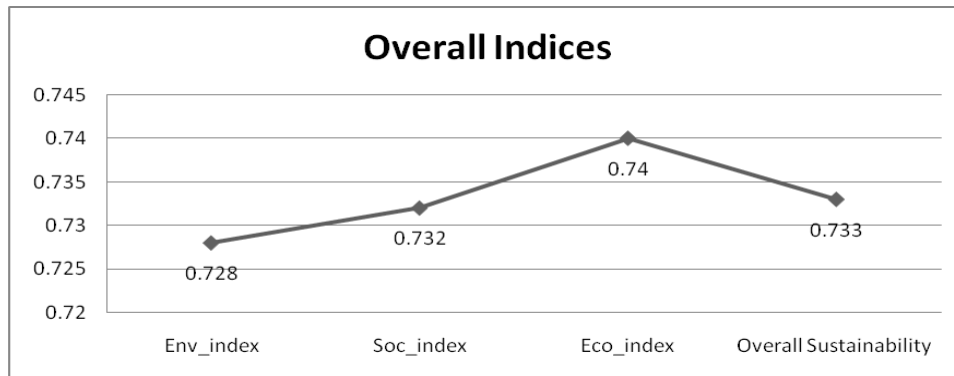


Figure 12 Result of overall indices

The results indicate that the sustainability of a hollow fiber membrane module is at an average level. Hence, improvements are needed for the weak areas of the sustainability level. The analysis of the results indicates that fabrication processes need to be monitored because these areas display the lowest level of sustainability compared to another phases. Improvements can be achieved by monitoring the resources used during the fabrication process. Electricity and water consumption during the fabrication phase should also be monitored and improved without reducing membrane performance. Utilizing the space during transportation can also reduce costs during the transportation phase. The

suggestions and implementations related to improving the sustainability level are important to attain a sustainable product lifecycle.

The developed GUI can be used even by a user with no knowledge of the fuzzy logic calculations embedded under the Matlab GUI platform, which has codes and callback functions that use fuzzy linguistics. The developed GUI uses fuzzy logic, thus enabling the intermediate assessment of the product lifecycle. The developed GUI can also obtain the sustainability indexes for the product lifecycle phase for the three sustainability aspects. Another advantage of the developed GUI is that the results are obtained in terms of indexes, thus making the

data understandable and easy to interpret. A case study has been successfully conducted by using the developed GUI. The developed GUI was able to assess the sustainability and lifecycle of the hollow fiber membrane module.

The data of the input parameters and reference values (minimum and maximum values) need to be identified to assess the sustainability of the membrane lifecycle. The developed GUI methodology does not provide a complete database. All input parameters and reference values need to be inserted by the user. Users need to gather the values through the databases before they can use the GUI fuzzy developed methodology, thereby allowing the sustainability of the product lifecycle to be determined for further improvements.

5.0 CONCLUSION

The sustainability performance index can be assessed by using the proposed fuzzy logic-based GUI. In this approach, all fuzzy calculations are embedded in the GUI with the codes and callback functions by using fuzzy linguistics. The developed GUI is more user friendly than conventional calculations using formulas or mathematical approaches. This proposed GUI provides a computer-based tool to support the decision-making process of designers and manufacturers and enable them to monitor the level of sustainability of product development. Hence, improvements can be achieved by considering weak areas as areas for improvement.

The fuzzy-based approach will continue to play an important role in the future. As an excellent tool for research, particularly for monitoring the process for further improvement toward sustainability, the developed fuzzy-based GUI can be extended by future works to assess the sustainability level of all products.

Acknowledgement

The authors thank the Ministry of Higher Education, Universiti Teknologi Malaysia, and the Research Management Center for providing financial support through the Long Term Research Grant Scheme (Grant No.4L804) and Research University Grant (Grant No.06H88).

References

- [1] Ness, B., E. Urbel-Piirsalu, S. Anderberg, and L. Olsson. 2007. Categorising Tools for Sustainability Assessment. *Ecological Economics*. 60(3): 498-508. DOI:10.1016/j.ecolecon.2006.07.023.
- [2] Hemdi, A. R., M.Z. Mat Saman, and S. Sharif. 2011. Sustainability Evaluation using Fuzzy Inference Methods. *International Journal of Sustainable Energy*. 2011: 1-17.
- [3] Srivastava, P., A. Burande, and N. Sharma. 2013. Fuzzy Environmental Model for Evaluating Water Quality of Sangam Zone during Maha Kumb 2013. *Applied Computational Intelligence and Soft Computing*. 2013: 1-7.
- [4] Mahmood, S., N. S. Jiran, M. Z. Mat Saman, and N. M. Yusof. 2014. Determination of Parameters for Sustainability Assessment of Hollow Fiber Membrane Module Life Cycle. *Advanced Material Research*. 845: 724-729.
- [5] Avouris, N.M. and S. Finoffi. 1993. User Interface Design to Expert Systems Based on Hierarchical Spatial Representations. *Expert Systems with Applications*. 6(2): 109-118.
- [6] Ullah, A., M. Z. Mat Saman and S. Mahmood. 2014. Development of Multi-criteria Analysis Methodology to Determine Product End-of-life Treatment Option. *Advanced Material Research*. 845: 852-856.
- [7] Hassan, M. F., M. Z. Mat Saman, S. Sharif, and B. Omar. 2013. Selection of Product Design Configuration for Improves Sustainability using The Product Sustainability Index (ProdSI) Scoring Method. *Applied Mechanics and Material*. 315: 51-56.
- [8] Ghadimi, P., N. M. Yusof, and M. Z. Mat Saman. 2011. A Graphical User Interface for Assessing the Sustainability Level of Manufactured Products: An Automotive Component Case Study. *Perintis e-Journal, Special Issues on Science for Sustainability*. 1: 10-16.
- [9] Hai, L. T., P. H. Hai, and C. L., Thai. 2011. Software for Sustainability Assessment: A case study in Quang Tri Province, Vietnam. *Environmental Modelling & Assessment*. 16(6): 541-550.
- [10] Hidalgo, D., R. Irueta, et al. 2007. Development of A Multi-function Software Decision Support Tool for the Promotion of the Safe Reuse of Treated Urban Wastewater. *Desalination*. 215(1-3): 90-103.
- [11] Zhu, X., and A. P. Dale. 2001. JavaAHP: A Web-based Decision Analysis Tool for Natural Resource and Environmental Management. *Environmental Modelling & Software*. 16(3): 251-262.
- [12] Chi, H. 2000. Computer Simulation Models for Sustainability. *International Journal of Sustainability in Higher Education*. 1(2): 154-167.
- [13] Mahmood, S., A. R. Hemdi, M. Z. Mat Saman, and N. M. Yusof. 2014. Fuzzy Logic Approach for Assessing Sustainability: Methodology Development for Hollow Fiber Membrane Module. *Advanced Material Research*. 845: 579-583.
- [14] Matlab Software version 8.2.0.701. Accessed January 2014. Mathwork Licence No 648116.
- [15] Rajaram, T., and A. Das. 2010. Modeling of Interactions among Sustainability Components of An Agro-Ecosystem using Local Knowledge through Cognitive Mapping and Fuzzy Inference System. *Expert Systems with Applications*. 37: 1734-1744.
- [16] Phillis, Y.A., and L. A. Andriantiatsaholiniaina. 2001. Sustainability: An Ill-defined Concept and its Assessment using Fuzzy logic. *Ecological Economics*. 37(3): 435-456.
- [17] PE: GaBi 6 Software-System and Databases for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen 1992-2013. Accessed May 2013.
- [18] Khayet, M., C.Y. Feng, K.C. Khulbe, and T. Matsuura. 2002. Preparation and Characterization of Polyvinylidene Fluoride Hollow Fiber Membranes for Ultrafiltration. *Polymer*. 43: 3879-3890.
- [19] Idris, A., A.F. Ismail, N.M. Yusof, and S.J. Shilton. 2002. Optimization of Cellulose Acetate Hollow Fiber Reverse Osmosis Membrane Production using Taguchi Method. *Journal of Membrane Science*. 205(1-2): 223-237.